

NGV SOLENOID VALVE 2 WAYS



Model: CI – 1220 – 6 – SS

Brand: CODEIRON


Origin: Argentinian industry

Norm: GE N1-441

TECHNICAL FEATURES

Work pressure	Nominal 200 BAR. Max. 300 BAR.
Working temperature	-10°C / 90°C
Standard Connection	3/8" NPT
Passage	9mm
Drive	2 ways by piston
Capacity	900 m ³ /h
Position	Vertical with coil upwards
Measures	59 x 59x134 cm
Gross Weight	1,9 Kg
Application	Natural Gas vehicular
Fluid	Dry natural Gas

EXPLOSION ASSEMBLY

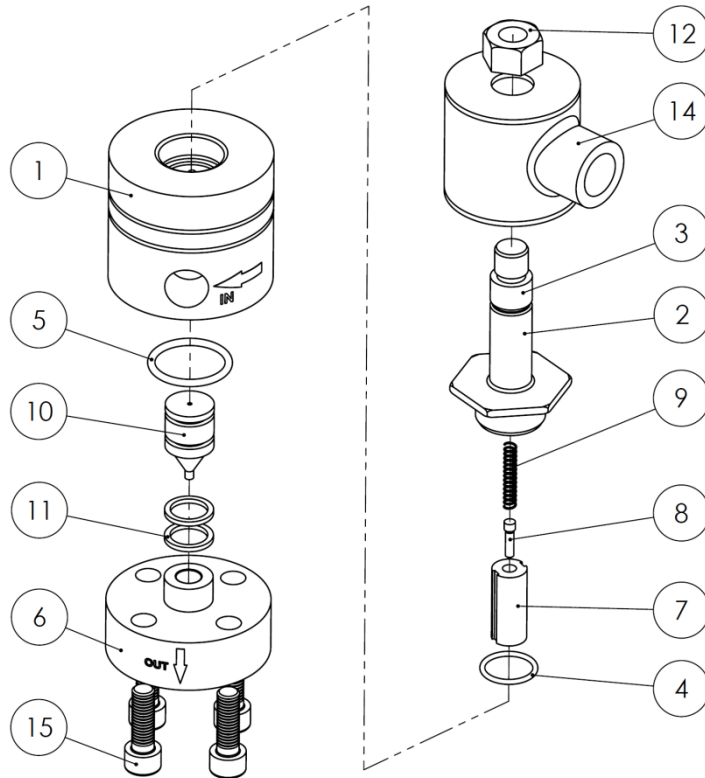

Nr.	Qty	Description	Material
1	1	BODY	AISI 304
2	1	NON MAGNETIC COVER	AISI 304
3	1	MAGNETIC CAP SCREW	SAE 1010 ANNEALING
4	1	O-RING 2-017	NITRILO 90
5	1	O-RING 2-120	NITRILO 90
6	1	FLANGE	AISI 304
7	1	PISTON PILOT	SAE 1010 ANNEALING
8	1	NEEDLE PILOT	AISI 304
9	1	SPRING	AISI 302
10	1	PISTON PLASTIC	ACETAL
11	2	RING PISTON PLASTIC	ACETAL
12	1	SUPERIOR NUT	AISI 304 OR LATON
13	1	SPIRAL CUPPER ELECTROLITIC	
14	1	COIL	SAE 1212
15	4	ISO 4762 M8 x 25mm	